

niagara edge 10

PRODUCT DEFINITION

Tridium's Niagara Edge 10 is an IP-based field equipment controller powered by the Niagara Framework®. Niagara Edge 10 controllers drive applications such as zone temperature control, and the operation of fan coil units, single-stage air handling units, water-source heat pumps and more. Niagara Edge 10 controllers run the full Niagara stack, with 10 points of on-board IO and IO-R-34 expansion capability. Niagara Edge 10 licensing supports three devices and 50 total points to harness the full power of Niagara at the edge.



ACE DETERMINISTIC ENGINE

- Utilize Wire Sheet to create deterministic applications that enable fast startup to control time and deterministic timing when servicing the IO.

NETWORK

- Edge 10 controllers can be daisy chained to continue network connectivity and eliminate the need for separate wiring back to a switch
- Connect Niagara Edge 10 controllers to your main building or IT network and manage them directly with a Supervisor alongside of a JACE®
- Use the secondary Ethernet port of the JACE 8000 to create a private network of Niagara Edge 10 controllers

SPECIFICATIONS

Niagara 4 - Requires Niagara 4.7 or later

HARDWARE

NXP iMX6 SoloX2: 800 MHz ARM Cortex-A9/M4

512 MB DDR SDRAM

2GB total eMMC flash storage with user space set at 1GB

Powered from 24VAC/DC source

5 Universal inputs: Type 3 (10K) thermistors, 0-100K ohm, 0-10VDC, 0-20mA with external resistor, Dry Contact

2 Analog outputs: 0-10VDC, 4mA max output current

3 Digital outputs: Triac, 24VAC @.5 amp

2 10/100MB Ethernet ports capable of daisy chaining

1 RS-485 serial port

Real-time clock


Secure boot

powered by

niagara
framework®

MOUNTING

Support mounting on EN50022 standard 7.5mm x 35mm DIN rail or panel mounting

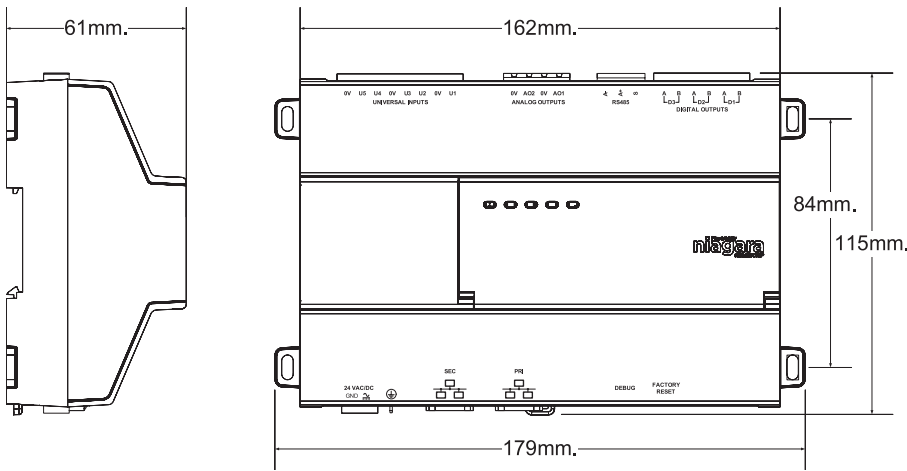

AGENCY CERTIFICATIONS

- FCC Part 15, class b
- C-UL
- CE
- UL916, Open Energy Management Class 2
- RoHS2
- REACH
- WEEE
- CAN/CSA-C22.2 No. 205-12

EXPANDABILITY

Two (2) IO-R-34 modules connected over a shielded 485 bus

CONNECTIVITY

When data from external sources — i.e. thermostats, variable speed drives, or smart sensors — is required to drive an application, the Niagara Edge 10 allows for connections to those types of external sources using BACnet/IP, Modbus, and SNMP over an IP network and/or BACnet and Modbus over a 485 network.

ENVIRONMENTAL SPECIFICATIONS

- **Operating temperature:** -20 to 60°C
- **Storage temperature:** -40 to 85°C
- **Humidity:** 5-95% non-condensing
- **Shipping & vibration:** ASTM D4169, Assurance Level II
- **MTBF:** 10 years

ORDERING INFORMATION

Part number	Description
EDGE-10	Niagara Edge 10 field controller with 10 points of onboard IO, 1 RS-485 serial port, and 2 10/100 Ethernet ports. Supports two (2) IO-R-34 modules. Includes Niagara N4 and drivers for BACnet, Modbus and SNMP. Supports up to 3 devices or 50 points. Includes all software updates released for commercial use by Tridium for the life of N4, but not for any later versions.

The Niagara Edge 10 controller is available through a wide variety of original equipment manufacturers. Our open distribution business model and open protocol support allow a vendor-neutral application compatible with devices and systems throughout the world.



tridium.com

Locations and customer support, worldwide

Headquarters
North America
1 804 747 4771

Support
North America & Latin America
1 877 305 1745

Europe, Middle East & Africa
44 1403 740290

Asia Pacific
8610 5669 7148

© 2019 Tridium Inc. All rights reserved. All other trademarks and registered trademarks are properties of their respective owners.

Information and/or specifications published here are current as of the date of publication of this document. Tridium, Inc. reserves the right to change or modify specifications without prior notice. The latest product specifications can be found by contacting our corporate headquarters, Richmond, Virginia. Products or features contained herein may be covered by one or more U.S. or foreign patents. This document may be copied only as expressly authorized by Tridium in writing. It may not otherwise, in whole or in part, be copied, photocopied, reproduced, translated, or reduced to any electronic medium or machine-readable form.